

# DATA SHEET

TYPE: PVDJP 020 - ....

Standard acc. to IEC 61071  
acc. to EN 61881

## CHARACTERISTICS

		10/0,33	10/0,22
Rated DC voltage	VDC		8 000
Voltage AC rms max	V		4 000
Capacitance	μF	0,33	0,22
C <sub>N</sub> tolerance	%		- 10/+10
Current	A rms	10	8
u <sub>max</sub> periodic	V		10 000
u <sub>s</sub> non periodic	V		12 000
i <sub>max</sub> periodic /0,1 Hz	kA	0,3	0,2
i <sub>s</sub> non periodic	kA	0,9	0,6
Self inductance	nH		< 15

## THERMAL CONDITIONS

Service temperature °C -25/+70

## DIMENSION

ØD ±1	mm	60
L	mm	133
Terminal	M	M8x8
Max. torque M8	Nm	8

## TEST DATA

Test voltage U <sub>T/T</sub>	VDC	12 000
Test time	sec	10


## DESIGN

Design MKP metallized polypropylene capacitors encapsulated in insulating case + polyurethan resin UL-94,V0, PCB and halogen free  
Operating position arbitrary

Safety devices No fuse Without interrupter

Weight kg 0,55

Outline drawing

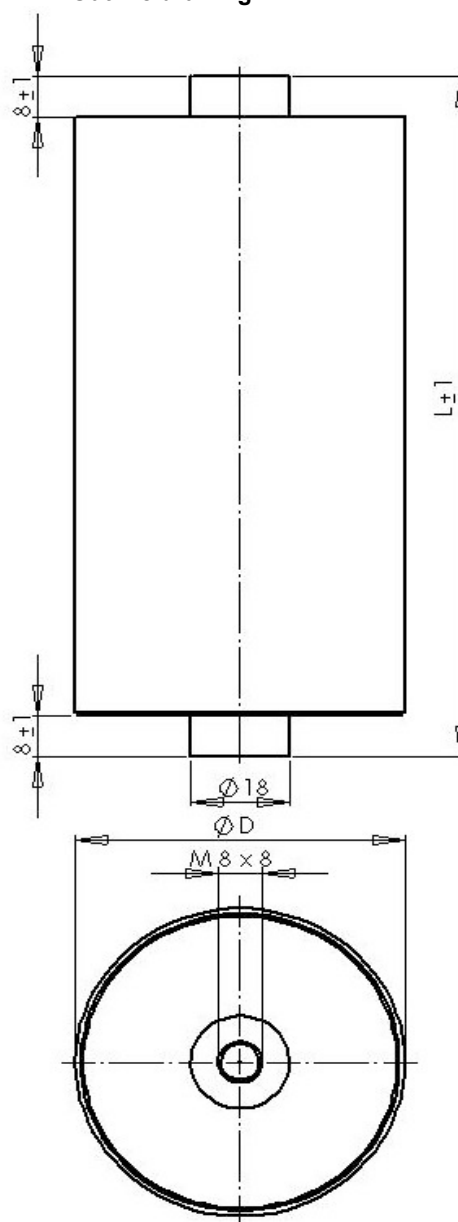

TYPE : see above		DRW. No. : 3BS 1116	DRAWN : Michalovičová	
			APPVD : Ing.Lipenský	
			Date : 11.5.2009	
	<b>ZEZ-SILKO s.r.o.</b> Pod Černým lesem CZ 564 22 ŽAMBERK Czech Republic	tel : +420 465 673 111 fax : +420 465 612 319 e-mail : zez@zez-silko.cz http://www.zez-silko.cz	Modification index :	